
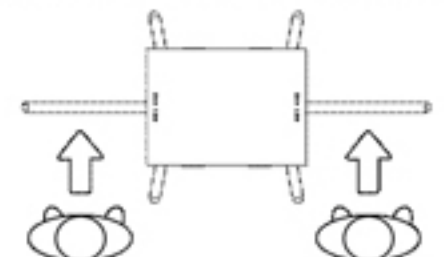
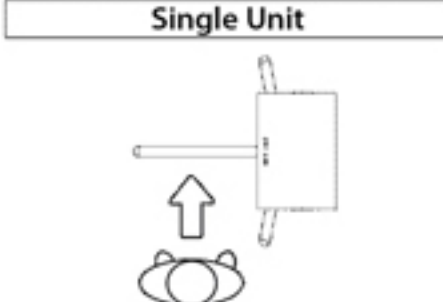





GENERAL SPECIFICATIONS

FKR 10777

	Material	Body	Art-Line design layered dark grey acrylic lower body, natural granite top lid.	
		Arm	Transparent acrylic. (opt. 304 grade stainless steel)	
	Available for	 INDOOR OUTDOOR ☐  INDOOR ☒		
	Energy	110/220-240V 50-60Hz. AC (±%10) - 24V DC		
	Control System	Dry contact (ground control)		
	Nr. of Passage Lanes	Double Unit  ☐ Single Unit  ☒		
		120° (3 Arms) Rotor System  ☒ 90° (Wing) Rotor System  ☐		
	Rotor System			
	Operation	 BI-DIRECTIONAL ☒  UNI-DIRECTIONAL ☐		
	Indicators	 S STANDARD ☒ O OPTIONAL ☐  S STANDARD ☒ O OPTIONAL ☐		
	Emergency	Arms allow free passage		
	Reduced Mobility (ADA) Compatibility	 AVAILABLE ☐  NOT AVAILABLE ☒		

For further details, please download "Technical Specifications" file.