
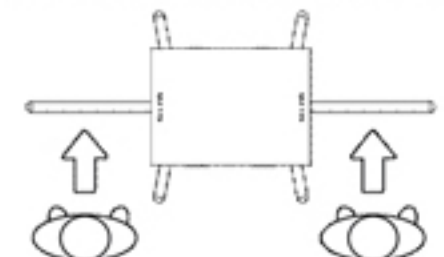
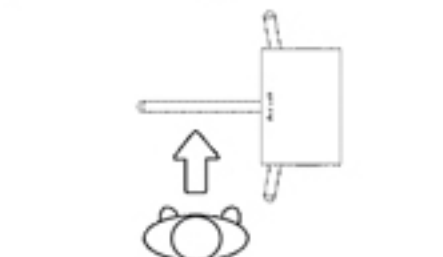





GENERAL SPECIFICATIONS

500-505-D

	Material	Body	304 grade stainless steel (opt. 316 grade).	
		Arm Wing	304 grade stainless steel (opt. 316 grade). 304-grade stainless steel (opt. 316 grade) wing frame with acrylic panel.	
	Available for	 INDOOR OUTDOOR ☒		 INDOOR ☐
	Energy	110/220-240V 50-60Hz. AC (±%10) - 24V DC		
	Control System	Dry contact (ground control)		
	Nr. of Passage Lanes	Double Unit  ☒		Single Unit  ☐
		120° (3 Arms) Rotor System  ☒		90° (Wing) Rotor System  ☒
	Rotor System			
	Operation	 BI-DIRECTIONAL ☒		 UNI-DIRECTIONAL ☐
	Indicators	 	S STANDARD ☒	O OPTIONAL ☐
		 	S STANDARD ☐	O OPTIONAL ☒
	Emergency	Arms allow free passage Wing allows free passage		
	Reduced Mobility (ADA) Compatibility	    AVAILABLE ☒		    NOT AVAILABLE ☐

For further details, please download "Technical Specifications" file.