
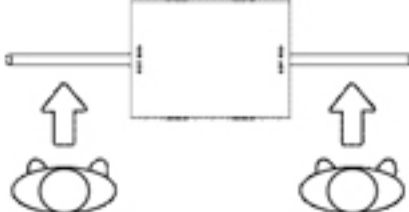







GENERAL SPECIFICATIONS

10705-E

 Material	Body	304 grade stainless steel (opt. 316 grade).	
	Wing	304-grade stainless steel (opt. 316 grade) wing frame with acrylic panel.	
 Available for	 INDOOR OUTDOOR		 INDOOR
 Energy	110/220-240V 50-60Hz. AC (±%10) - 24V DC		
 Control System	Dry contact (ground control)		
 Nr. of Passage Lanes	Double Unit  ☐		Single Unit  ☒
	120° (3 Arms) Rotor System  ☐		90° (Wing) Rotor System  ☒
 Rotor System			
 Operation	 BI-DIRECTIONAL		 UNI-DIRECTIONAL
 Indicators		 STANDARD	☒
		 STANDARD	☐
 Emergency		Wing allows free passage	
 Reduced Mobility (ADA) Compatibility	 AVAILABLE		 NOT AVAILABLE

For further details, please download "Technical Specifications" file.