
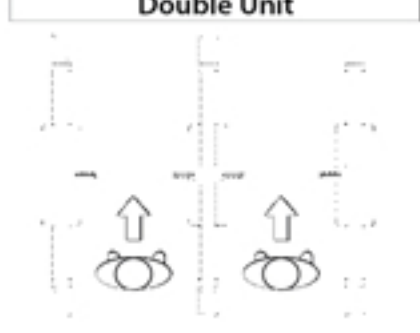
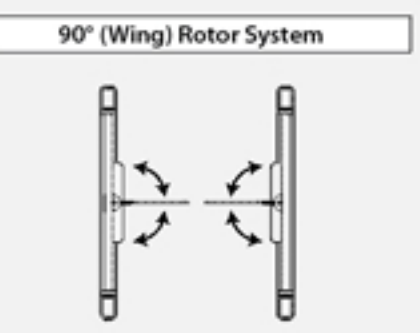





	Material	Body	10 mm acrylic top lid on 304-grade stainless steel body (opt. 316 grade), 6 mm acrylic side panels (opt. tempered glass).				
		Wing	Tempered glass.				
	Available for	 INDOOR OUTDOOR	☐	 INDOOR	☒		
	Energy	110/220-240V 50-60Hz. AC (±%10) - 24V DC					
	Control System	Dry contact (ground control)					
	Nr. of Passage Lanes	Double Unit		Single Unit			
			☒		☒		
	Wing Movement	Wings Retracting Into Body		90° (Wing) Rotor System			
			☐		☒		
	Operation	 BI-DIRECTIONAL	☒	 UNI-DIRECTIONAL	☐		
	Indicators		 STANDARD	☐	 OPTIONAL	☒	
			 STANDARD	☒	 OPTIONAL	☐	
	Emergency	Wings allow free passage					
	Reduced Mobility (ADA) Compatibility	 	AVAILABLE	☒	 	NOT AVAILABLE	☐